

SL08

SL

STEERABLE LIFT AXLE SUSPENSION SYSTEM



SL08

The **SL08** steerable lift axle suspension system is a lightweight compact design. It requires a compact envelope space for multi-axle applications such as the super dump. It features adjustable ride height and frame width for installation and/or inventory versatility.

- 8,000 pound suspension capacity
- Ride heights up to 19 inches
- Package space: 22.1 inches
- Six stud hub for 17.5 in. wheels
- Custom engineering available for specific customer requirements
- 5-year limited warranty*

* Contact your local W&C representative for complete warranty terms, conditions and limitations.



For more information, call 800.445.0736



Value-added options and critical dimensions


Pre-Plumbing System

- Fewer fittings reduces leak potential
- Better response when air is engaged
- Helps save time and money during the installation
- 100 percent leak tested at the factory





Ride Height Adjustability

- Accomplished through interchangeable lower air spring plate
- Can also be used to limit lift if ride height and driveline clearance fall within allowable criteria

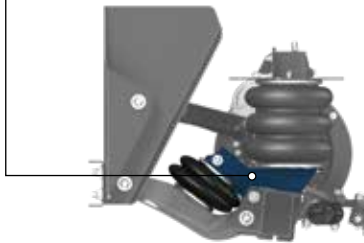

Ride Height Measurement Concept

- A.** Loaded Ground To Frame (GTF) Measurement
- B.** Static Loaded Radius (SLR) of tire
- C.** Ride Height ($A - B = C$)

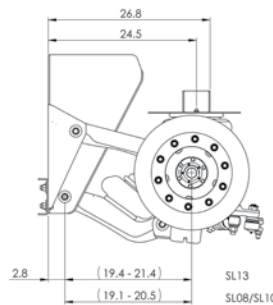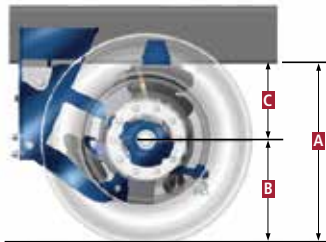

Package Space Dimension

Actual product performance may vary depending upon vehicle configuration, operation, service and other factors.
 All applications must comply with applicable specifications from W&C and the respective vehicle manufacturer.
 Contact W&C for additional details regarding specifications, applications, capacities, and operation, service and maintenance instructions.

Contact W&C at 972.547.6020 for additional information.



W&C
 725 E. University Drive, McKinney, Texas 75069
 972.547.6020 • 800.445.0736 • Fax 972.542.0097
www.wcsuspensions-intl.com

